

SIEMENS



Air-insulated Medium-Voltage Switchgear NXAirS, 24kV

[siemens.com.cn/energy-management](https://www.siemens.com.cn/energy-management)

Types

Application

Types
Typical uses
Classification

Requirements

Customer benefits and features

Technical Data

Electrical data and dimensions
Design data
Transportation and packing

Primary Solution

NXAirS 24kV

Design

Design of switchgear

Components

Vacuum circuit-breaker

Standards

Standards, specifications, guidelines

Circuit-breaker switchgear NXAirS, is factory-assembled, type-tested, metal-enclosed and metal-clad switchgear for indoor installation according to GB3906, DL404 and IEC 62271-200..

Loss of service continuity category	LSC2B (Metal clad)
Partition class	PM(Metal)
Internal arc classification	IAC A FLR $I_{sc} \leq 31.5\text{kA}$ arc duration=1s



NXAirS panel

Maxium rating 24kV/31.5kA/3150A

Application Typical uses

NXAirS circuit-breaker switchgear is used in substations and distribution system, mainly at the primary distribution level. E.g.

Application Public power supply system

- Power supply companies

Application Industry

- Power plant
- Cement industry
- Automobile industry
- Iron and steel works
- Mining industry
- Textile, paper and food industries
- Chemical industry
- Petroleum industry
- Pipeline installations
- Offshore oil devices
- Electrochemical plants
- Petrochemical plants
- Diesel power plants
- Emergency power supply devices
- Coal exploitation

Classification

NXAirS switchgear correspond to the following classifications according to GB3906, DL404 and IEC62271-200.

Loss of service continuity category and partition class		
Loss of service continuity category		LSC 2B (Metal clad)
Partition class		PM (Metal)
Accessibility to compartments		
Busbar compartment		Tool-based
Switching-device compartment		Interlock-based
Connection compartment		Interlock-based and use special tools
Internal arc classification		
The following internal arc classification are fulfilled		
IAC A FLR, I_{SC} , t		
	IAC	= Internal arc classification
	A	= 300mm distance of indicators for test (installation in closed electrical service location)
	F	= Front arrangement of indicators for test
	L	= Lateral arrangement of indicators for test
	R	= Rear arrangement of indicators for test
	I_{SC}	= Test current for NXAirS up to 31.5kA
	t	= Arcing time 1s
In this way, NXAirS is suitable for unrestricted application (wall or free-standing arrangement) in electrical service locations up to the maximum short-circuit current rating.		

Requirements

Customer benefits and features

Benefits	Features
<p>Peace of mind</p> <p>For power supply companies and industrial plants, the certification of NXAirS according to the latest standards has very concrete advantages, whose smooth operation provide maximum safety for users.</p>	<ul style="list-style-type: none"> • Type-tested switchgear according to GB, DL and IEC standard. • Independent pressure-resistant partitions for each compartment. • Use of maintenance-free vacuum circuit breakers. • Type testing of the vacuum circuit breaker. • Pressure-resistant partitions. • Use of standard, worldwide available components. • Quality management according to ISO9001.
<p>Saves Lives</p> <p>All switchgear types of the NXAirS family are approved with internal arc classification IAC A FLR, loss of service continuity category LSC 2B, partition class PM. This makes them suitable for universal installation, meeting the highest requirements regarding personal safety.</p>	<ul style="list-style-type: none"> • All switching operations with high-voltage door closed. • Metallic enclosure, earthed shutters and partitions. • Reliable interlock mechanism installed on high voltage door. • Switchgear with internal arc classification according to IAC A FLR. • Loss of service continuity category LSC2B. • Busbar, cable connection and switching-device compartments are divided into independent compartment. • Use of vacuum circuit breakers. • Standard degree of protection IP4X. • Shutters of busbar compartment cover the stationary contact for preventing electric shock to maintainer. • Reliable mechanical interlocking system.
<p>Save money</p> <p>The adoption of newly designed 3AE maintenance-free embedded pole breaker enable continuous operation without expensive shutdown times.</p>	<ul style="list-style-type: none"> • Stable insulation performance—the use of embedded pole type VCB avoids the environment influence maximumly. • Constant contact resistance—the absence of oxidation in a vacuum keeps the metal contact surfaces clean. For this reason, contact resistance can be assured to remain low throughout the service life of the equipment. • Large total breaking times—Under the rated normal current, the breaker can be interrupted up to 30,000 times. • Maintenance-free within 10,000 times operation cycles—throughout its entire service life, the vacuum interrupter operates reliably at all times—without any forms of maintenance within 10,000 times operation or 10 years. The arc voltage is thus extremely low—only 20 to 200V. And, on account of short arcing times of max. 15ms, the energy consumption in the contact gap is very low.

Electrical Data and Dimensions

Rated values

-rated voltage	kV	24
-rated frequency	Hz	50
-short-duration power frequency withstand voltage (phase-to-phase, phase-to-earth)	kV	65/79
-lightning impulse withstand voltage (phase-to-phase, phase-to-earth)	kV	125/145
-short-circuit breaking current (max.)	kA	25, 31.5
-short-time withstand current, 4s (max.)	kA	25, 31.5
-short-circuit making current (max.)	kA	63, 80
-peak withstand current (max.)	kA	63, 80
-busbar current	A	1250, 2000, 2500, 3150
-Feeder current	A	1250, 2000, 2500, 3150

Dimension

Width W	mm	1000
Height	mm	2854/2620/2695
Depth D	mm	1810/1848
Weight	kg	900 ~ 1300

Dimension of low-voltage compartment

	Standard
Width mm	1000
Height mm	630
Depth mm	400

Dimension of connection compartment



Width mm	1000
Height mm	1150
Cable terminal to earth mm	≥ 750

Technical Data



Design data

Structure view of panel body



- Please consult for low indoor height.
- A passage with 1200mm width must be available alongside the panel so as to push the withdrawable part into this passage.

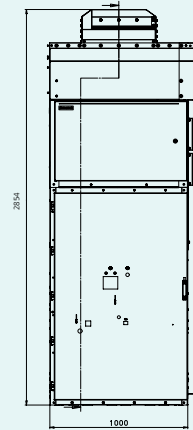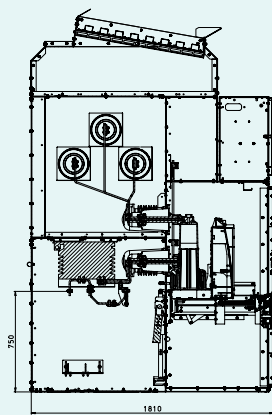

Structure view of NXAirS 25kA/1250A

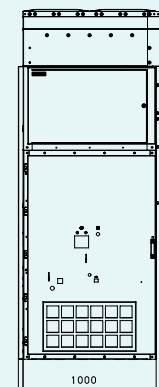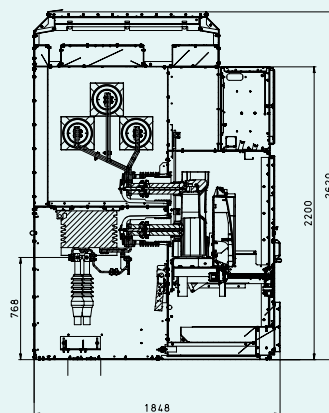

Structure view of NXAirS 31.5kA/2500A

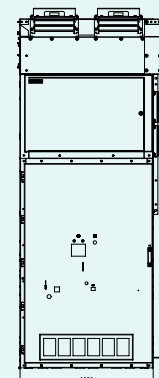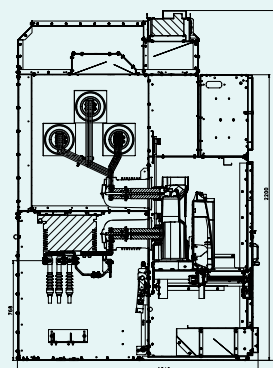

Structure view of NXAirS 31.5kA/3150A

Transportation and packing

Transportation

The following factors should be taken into account when deciding on the size of transport units to be selected:


- Transport facilities on site
- Transport weights and dimensions
- Size of building doorways

Packing

	Dimensions, volume and weight				
	Width m	Depth m	Height m	Volume m ³	Total weight kg
One panel	1.30	2.07	2.93	7.88	1459
Two panels	2.47	2.07	2.93	14.98	1610
Three panels	3.48	2.07	2.93	21.11	1788

Packing type	Transport by	Method of packing
Simple	Road	Panels on wooden pallets and cover the panels with polyethylene sheets bag.
Standard	Rail and road	Panels on wooden pallets, cover the panels with polyethylene sheets bag and seal with wooden floor.
Export	Ship	Panels on wooden pallets, cover with polyethylene sheets bag by vacuumized treatment , welded together with desiccant bags and sealed with the fumigated wooden box board; max. storage:6 months

Floor cutouts and fixing points

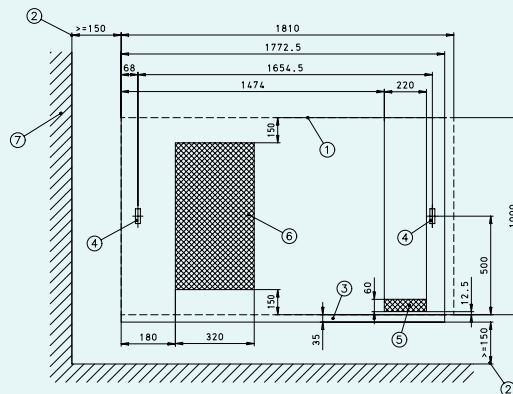


- 1.Foundation frame
- 2.Distance to the wall
- 3.Left-side wall
- 4.Fixing point, the rectangle hole is 60 × 20mm
- 5.Control cable cutout
- 6.High-voltage cable cutout
- 7.Building wall

Primary Solution



NXAirS 24kV

Withdrawable panel

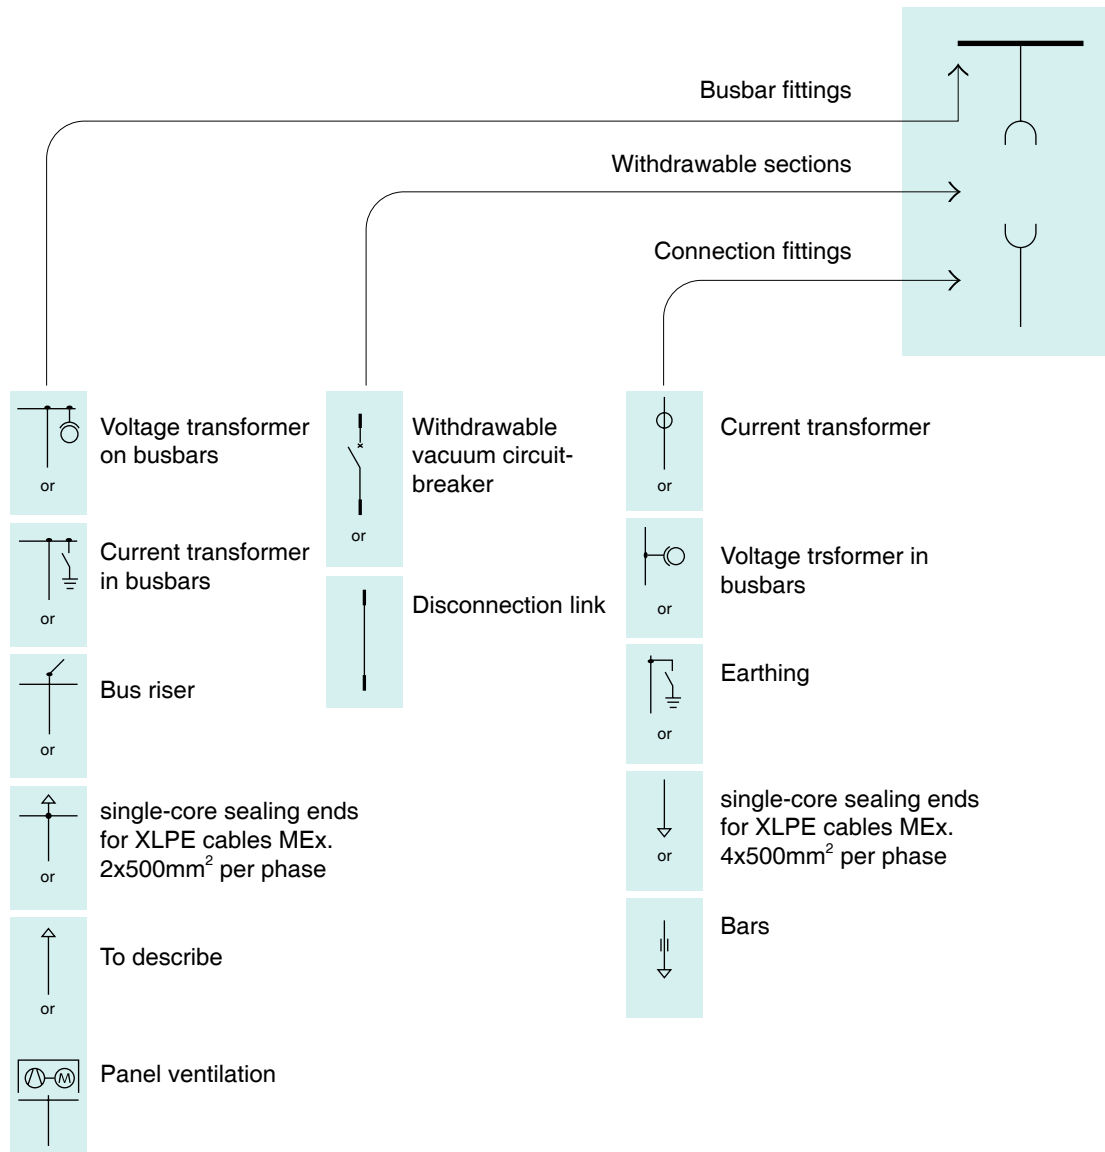

NXAirS 24kV


Subsection busbar connection panel

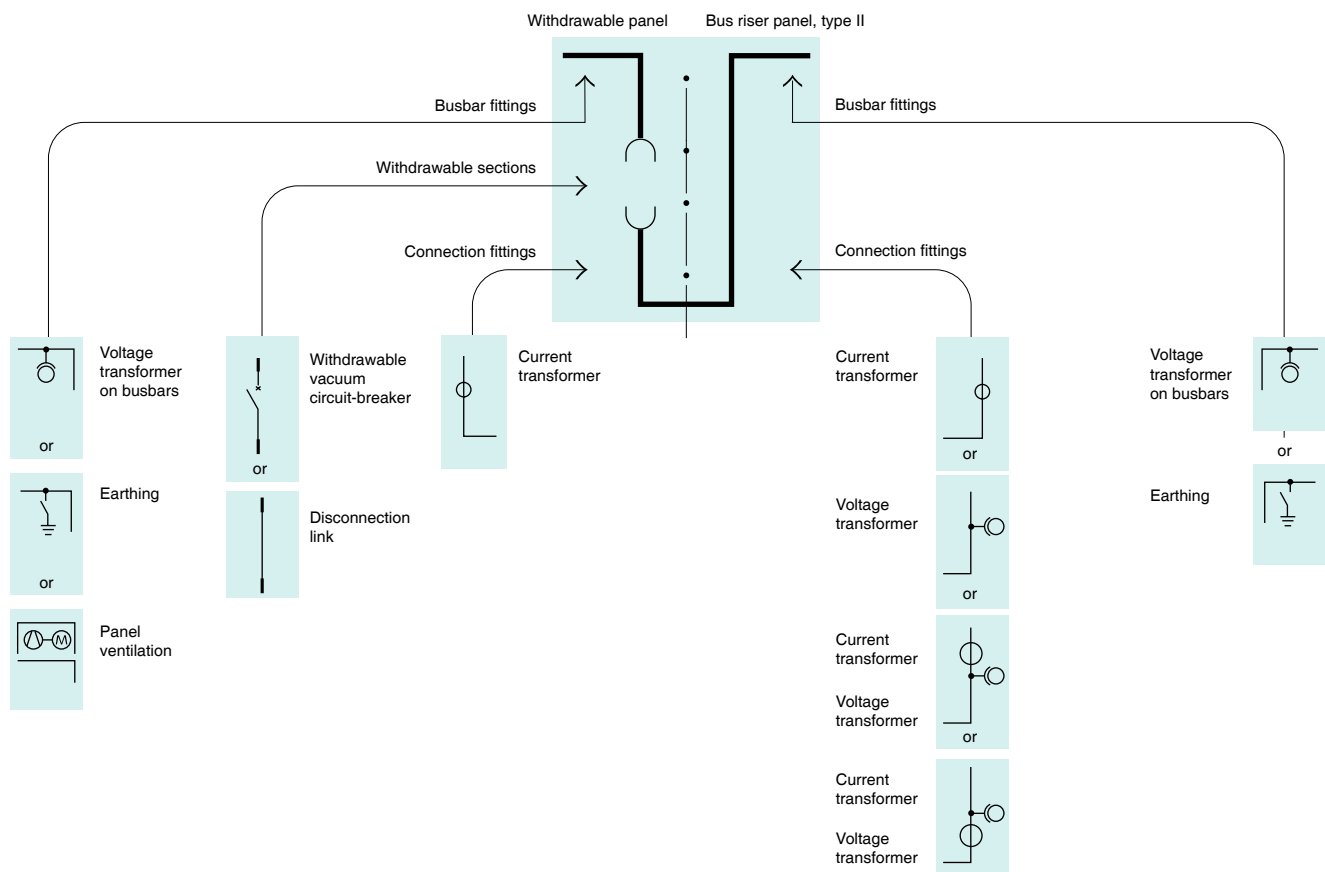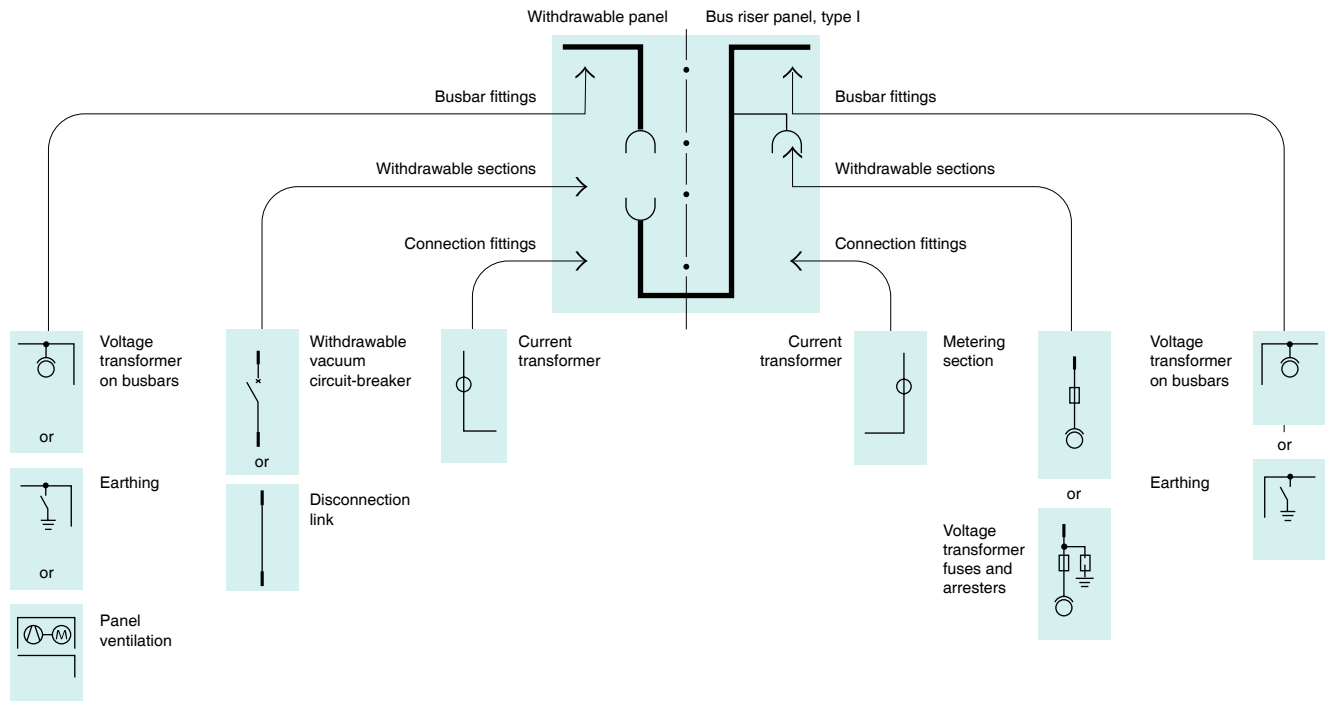

Primary Solution


NXAirS 24kV

Subsection busbar connection panel

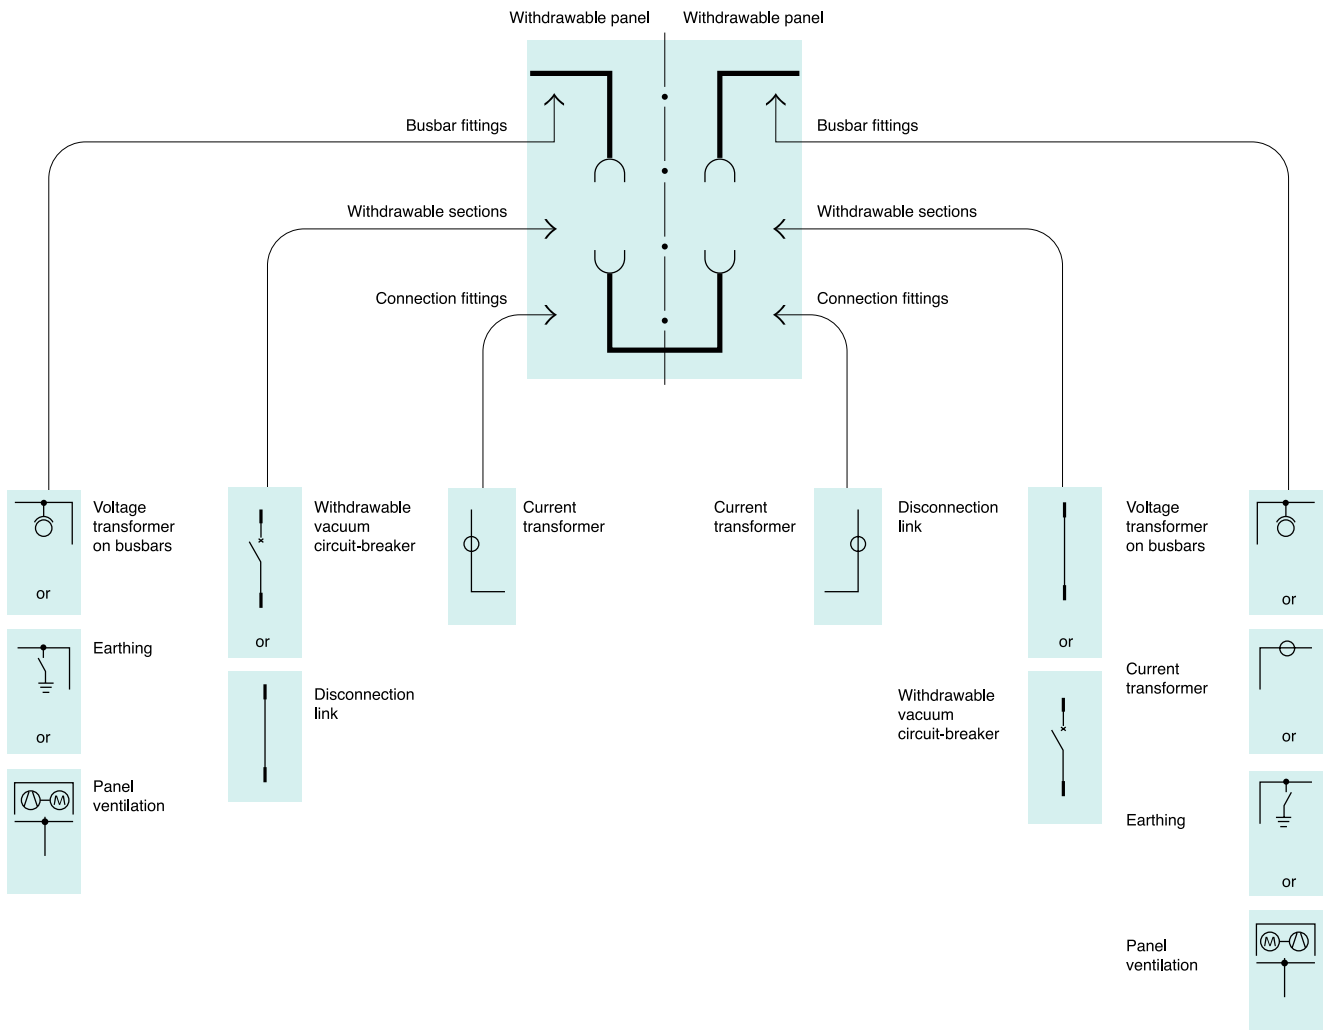


NXAirS 24kV

Busbar connection panels; Type I

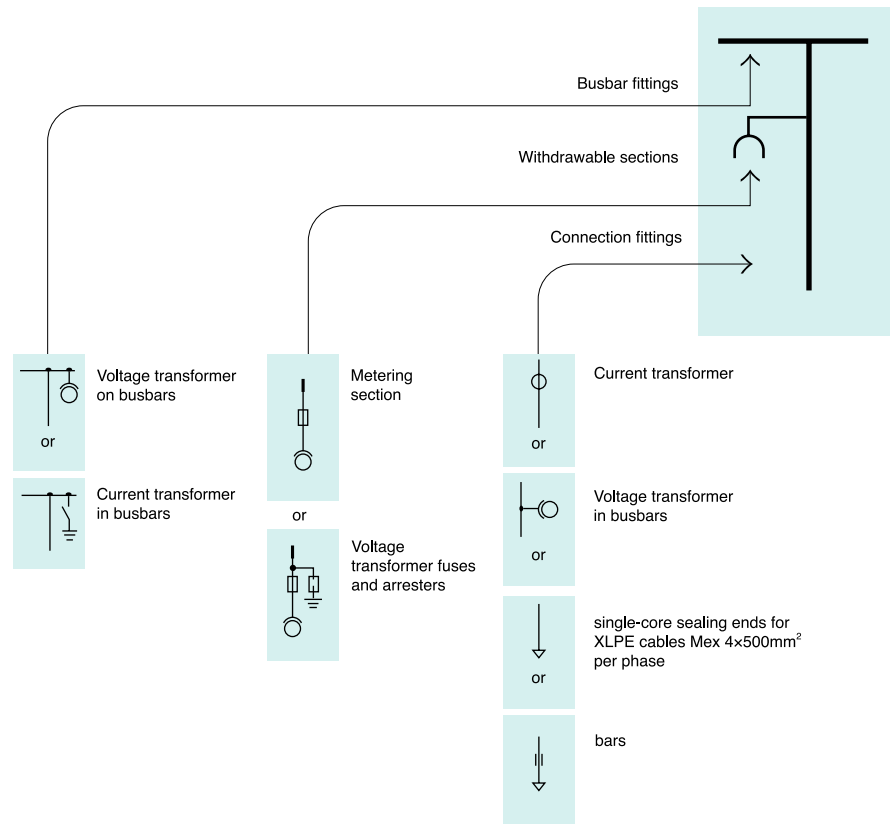


Busbar connection panels; Type II

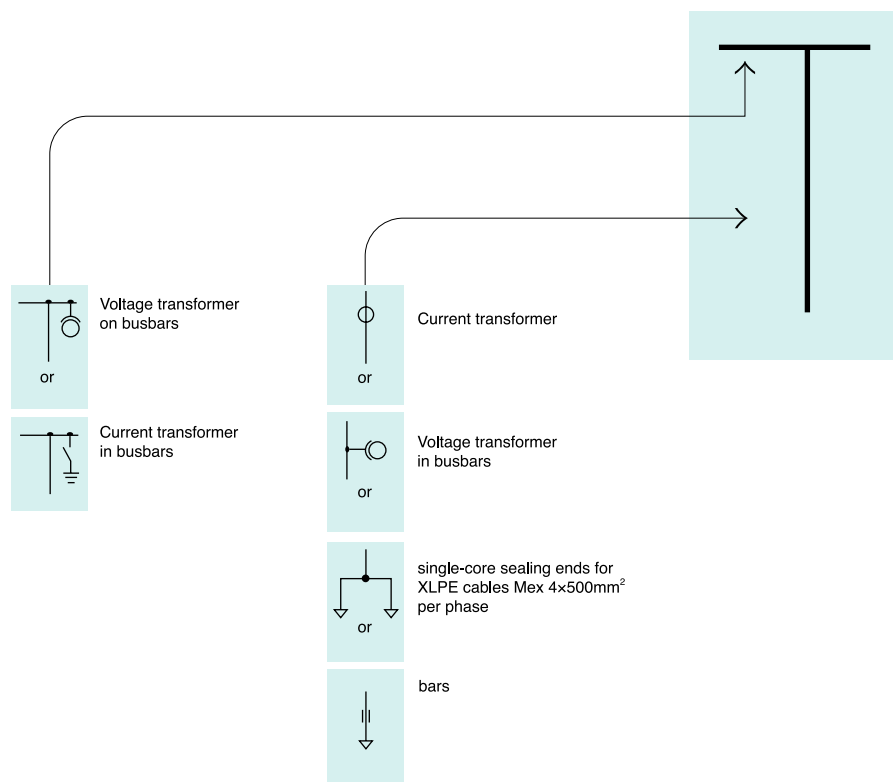

Primary Solution


NXAirS 24kV

Cable connection panel and withdrawable metering panel

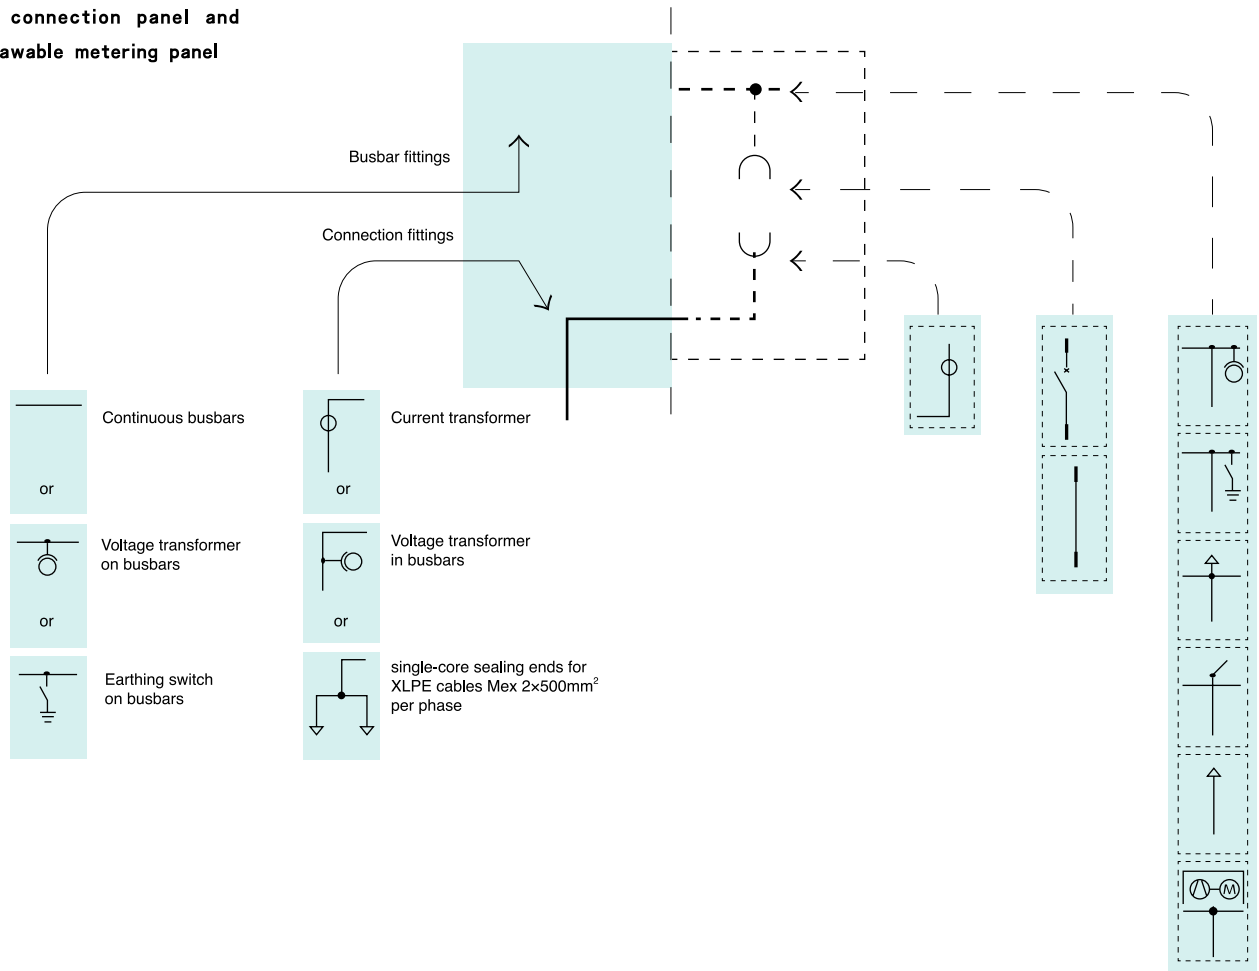

NXAirS 24kV

Withdrawable metering panel

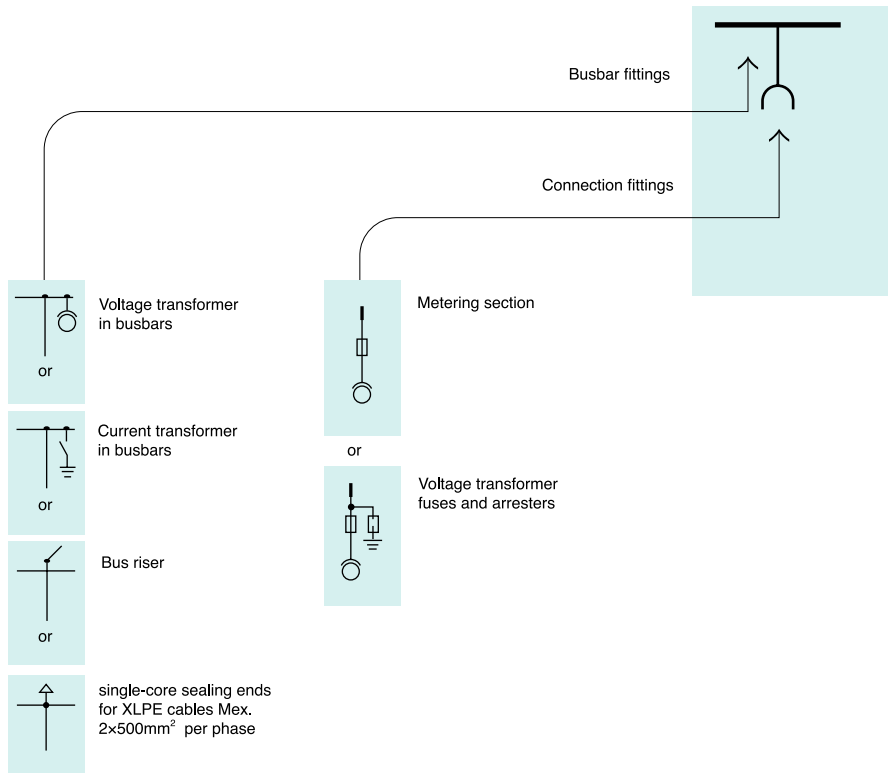

Design

Design of Switchgear

Features


- All switching operations always with high-voltage door closed
- By operating a key the interlocking can be achieved by removing part of the withdrawable earthing and circuit-breaker of high-voltage
- Ergonomically favourable height for all control and indicator element
- Option: Verification of safe isolation from supply of feeder or busbar by means of a capacitive voltage detection system

Interlocks

- Interlocking conditions are satisfied according to GB 3906 IEC 62 271-200
- Feeder earthing switch can only be operated with switching device in disconnected position
- Switching device can only be moved on the movable part with the associated switching device OPEN, earthing switch OPEN and the HV door closed
- Switching device can only be operated in testing, interlocked disconnected or service position
- The high-voltage door can be closed only if the withdrawable part is in testing position

Additional the safety interlocking

- Mechanical coding prevents insertion of switching devices for lower rated normal currents into panels with higher rated normal currents
- Interlocking of high-voltage door against withdrawable part
- Option: Withdrawable electromagnetic interlocks
- Option: Earthing electromagnetic interlocks

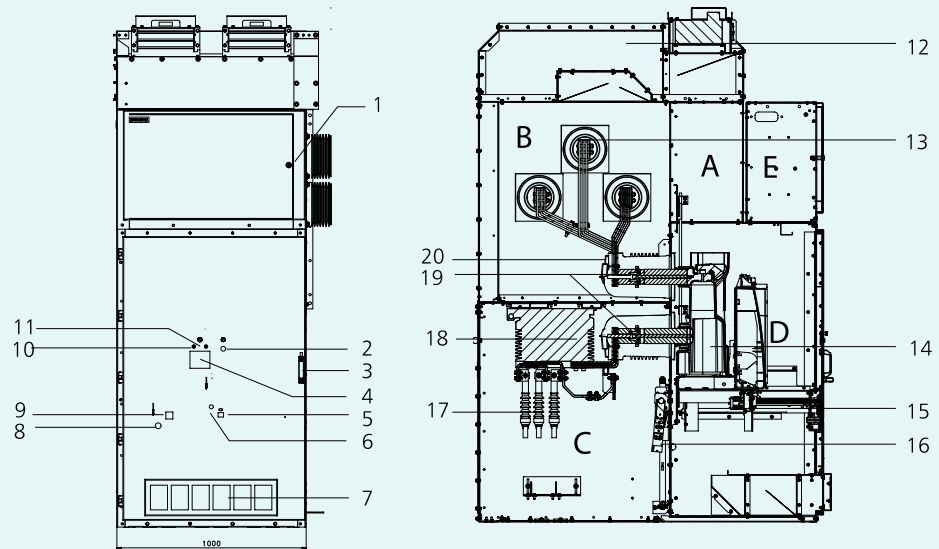

- | | |
|--|---|
| 1. Locking device of the low-voltage compartment | 11. "OFF" opening for circuit breaker |
| 2. Opening for spring charge | 12. Pressure release duct |
| 3. Door knob for opening the high-voltage door | 13. Busbars |
| 4. Indication of spring charge, circuit breaker & cycle counter of the circuit-breaker | 14. Embedded pole interrupter |
| 5. Operation hole for in-service position locking | 15. Mechanism and interlocking unit for the circuit-breaker |
| 6. Position to move off the switch mechanism for the operation of the hole | 16. Earthing switch |
| 7. Ventilation | 17. Cable connection |
| 8. Actuating opening to move the earthing switching device | 18. Current transformer |
| 9. Mechanical earthing switch position indicator | 19. Contact system |
| 10. "ON" opening for circuit breaker | 20. Contact box |
-
- | |
|---------------------------------|
| A. Switching-device compartment |
| B. Busbar compartment |
| C. Connection compartment |
| D. Withdrawable circuit-breaker |
| E. Low-voltage compartment |

Design of Switchgear

Frame

- Bolted steel sections and sheets
- Rails to support the withdrawable device
- Steel sections and sheet galvanized
- Doors and front frame powder-coated, grey
- Installation side panels powder-coated, grey

Compartmentalization

- Bolted galvanized steel sheets divide the panel into the busbar compartment, withdrawable device compartment and connection compartment
- Degree of protection between individual compartments: $\geq \text{IP2X}$
- Complete compartmentalization maintained even with withdrawable device in connected position on account of the fitted penetration-type bushings
- Upper and lower static contacts fixed in penetration-type bushings
- Enforced operated metal shutters for opening or closed the penetration-type bushings while the withdrawable device is being moved
- Metal shutters can be locked when the withdrawable device is racked out
- Upper shutter (access to busbar) or lower shutter (access to cable) can each be unscrewed independently of the other

Partitions

The use of partition is to separate the adjacent rooms into inaccessible compartment.

- Galvanized steel sheet
- Partition level PM
- IP4X protection class between busbar compartment and adjacent panels. The busbar compartment could choose the partition with bushing.

Pressure relief

Any overpressure inside the panel resulting from fault arcing is released by the pressure relief duct

- Galvanized sheet steel
- Separate pressure relief duct for busbar compartment, withdrawable device compartment and cable connection compartment



Pressure relief (part)



Cable compartment

Design

Design of Switchgear

Busbar compartment

- Enclosure made of galvanized sheet-steel.
- Pressure is released upwards.
- Bushing disconnection is between switchgear and switchgear.
- Busbar adopts flat copper, bolted from panel to panel.
- Pressure-resistant partitions are between connection compartment and switching-device compartment.
- Option: Busbar earthing switch.
- Option: Busbar voltage transformer.
- Option: Coupling electrode for capacitive voltage detection system.

Switching-device compartment

- Enclosure made of galvanized sheet-steel.
- Pressure is released upwards.
- Panel front is coated with powder of epoxy resin.
- Shutter operating mechanism separately for closing and opening the busbar compartment and connection compartment. A padlock can be chosen.
- High-voltage door resistant pressure while arc produced in the panel.
- Metallic ducts on the side are for laying control cables.
- Low-voltage plug connector for connection of control cables between primary part and secondary part.
- Follows various removable devices are for different panel versions.
 - Vacuum circuit-breaker
 - Handcart for disconnection
 - Removable metering unit

Connection compartment

- Enclosure made of galvanized sheet steel.
- Pressure is released upwards.
- Pressure-resistant partitions are between connection compartment and busbar compartment
- Earthing busbar
- Option: Coupling electrode for capacitive voltage detection.
- Option: Current transformer.
- Option: Earthing switch.
- Option: Voltage transformer.
- Option: Arrester for protecting switchgear against external over voltage
- Suitable for connection of
 - Single-core XLPE cables up to $4 \times 500\text{mm}$
 - Three-core cables $3 \times 240\text{ mm}^2$
 - Incoming copper bar with bushings.



Busbar compartment with rated current 3150A



Busbar compartment with rated current 1250A

Vacuum circuit-breaker

Features

- Embedded pole type of 3AE
- Meet the latest standards of IEC 62 271 and GB1984.
- Ideal contact material and figures to assure low chopping current and constant contact resistance.
- All parts meet Siemens Germany quality standard.
- Complete type test
- High mechanical operation life
Maintenance-free within 10, 000 operating cycles under normal conditions.
- Few components and compact structure to assure more reliable and safe operation. Ideal switching of inductive load and capacity banks.
- 64-pole low-voltage plugs connector between circuit-breaker and fixed part.



Standards

Standards, specifications, guidelines

Standards

The switchgear complies with the relevant standards and specifications applied at the time of type tests.

		IEC标准	GB标准
Switchgear	NXAirS 24kV	IEC 62 271-1	GB/T 11022
		IEC 62 271-200	GB 3906
Devices	Circuit-breaker	IEC 62 271-100	GB 1984
	Disconnecter and earthing switch	IEC 62 271-102	GB 1985
	HV HRC fuses	IEC 60 282	GB 15166.2
	Voltage detection device	IEC 61 243-5	
Degree of protection	-	IEC 60 529	GB/T 4208
Insulation	-	IEC 60 071	GB 311.1
Transformers	Current transformer	IEC 60 044-1	GB 1208
	Voltage transformer	IEC 60 044-2	GB 1207

Type of service location


The switchgear can be used for indoor installation in accordance with GB50254-GB50259/IEC 61 936. (Substation installations above 1kV AC)

Access is restricted to authorized personnel and persons who have been properly instructed in electrical engineering. Untrained or unskilled persons may only enter under the supervision of authorized personnel or properly instructed persons.

Table—Insulating capacity

Rated voltage(rms value)	kV	24
Rated short-duration power-frequency withstand voltage (rms value)		
- Across isolating distances	kV	79
- Between phases and to earth	kV	65
Rated lightning impulse withstand voltage(peak value)		
- Across isolating distances	kV	145
- Between phases and to earth	kV	125

Altitude correction factor Ka

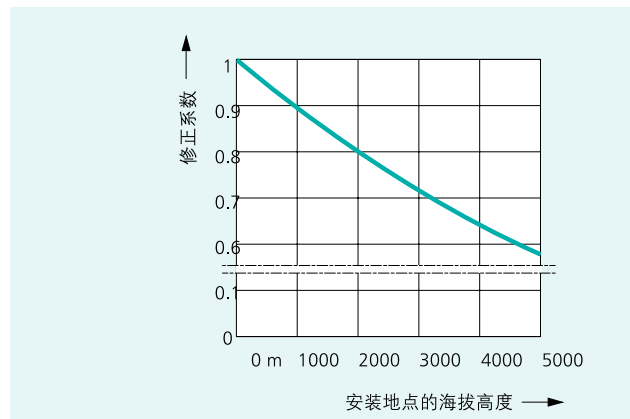

$$\text{Power-frequency test voltage} \geq \frac{\text{Rated power-frequency withstand voltage}}{1.1 \times K_a}$$

$$\text{Impulse test voltage} \geq \frac{\text{Rated power-frequency impulse withstand voltage}}{1.1 \times K_a}$$

Insulating capacity

- The insulating capacity is verified by testing the switchgear with rated values of short duration power-frequency withstand voltage and lightning impulse withstand voltage according to IEC 62 271-1, GB/T 11022 and DL404. (See table "Insulating capacity")
- The rated values are referred to sea level and to normal atmospheric conditions (101.3kPa, 20°C, 11g/m³ humidity in accordance with IEC 60 071 and GB 311.1).
- The insulating capacity decreases with increasing altitude. For site altitudes above 1000m (above sea level) the insulating capacity decreases, whose value is calculated by the correction factor Ka in the table. The correction factor Ka is determined by actual site altitude.

Standards, specifications, guidelines

Standards

According to GB 3906/DL404/IEC62 271-200 and GB/T 11022/IEC 62 271-1. The earthing switch meets standard of GB1985/IEC62271-102.

Current carrying capacity

Current carrying capacities refer to the following ambient temperatures:

Maximum of 24 hour average temperature $+35^{\circ}\text{C}$

Maximum $+40^{\circ}\text{C}$

Switchgear can be used under the following climate classes and ambient conditions with additional measures.

Environment condition

- Natural foreign materials
- Chemical active pollutants
- Small animals

Climate classes

1. Ambient air temperature: $-15^{\circ}\text{C} \sim +40^{\circ}\text{C}$
 2. Site altitude: 1000m and below
 3. Relative humidity: Max.95% for 24 hours, max.90% for one month.
 4. Earthquake intensity is smaller than magnitude 8.
 5. Site without fire, blast danger, serious dirtiness and severe shocks.
- The climate classes are classified according to IEC60721-3-3 and GB3906-2006.

It protects against solid foreign bodies, electric shock and ingress of water.

Degree of protection of the switchgear: IP4X

Degree of protection of compartments: $\geq \text{IP20}$

Internal arc classification

Safety of operating personnel is ensured by passing internal arc test. Internal arc test performed in accordance with IEC62 271-200/GB3906 -2006.

NXAirS comply with the internal arc classification IAC A FLR up to 31.5kA, 1s, for maximumly ensure personal safety

Definitions of criteria:

Acceptance criterion 1

Covers and doors remain closed. Limited deformations are accepted.

Acceptance criterion 2

No fragmentation of the enclosure. No projection of small parts above 60g weight.

Acceptance criterion 3

No holes in the accessible sides up to a height of 2m.

Acceptance criterion 4

Indicators do not ignite due to the effect of hot gases.

Acceptance criterion 5

The enclosure remains connected to its earthing parts.

SIEMENS LTD., CHINA (SLC)

No.7 Wangjing Zhonghuan Nanlu,
Chaoyang District Beijing 100102
Tel: 400-616-2020

SLC HARBIN BRANCH

Site A, 30F, Always Development Plaza,
No. 15 Hong Jun Street, Nangang District,
Harbin City, Heilongjiang Province 150001
Tel: (0451) 53009933

SLC CHANGCHUN BRANCH

F22, Tisco International Mansion, No.3218
Yatai Street, Changchun City, Jilin Province
130022
Tel: (0431)-8898 1100

SLC SHENYANG BRANCH

12-14F, Tower E, Fortune Plaza, No.59
Beizhan Road, Shenhe District, Shenyang
City, Liaoning Province 110013
Tel: (024) 82518111

SLC DALIAN BRANCH

No.117 Guangxian Road, Qixian Ling, High-
Tech Industry Zone, Dalian City, Liaoning
Province 114001
Tel: (0411) 83699760

SLC TIANJIN BRANCH

Room 1401, Tower 1, The Exchange
Building, No.189 Nanjing Road, Heping
District, Tianjin 300051
Tel: (022) 83191666

SLC SHIJIAZHUANG BRANCH

Room 1309, 13F World Trade Plaza
Hotel, No.303 Zhong Shan East Road,
Shijiazhuang City, Hebei Province 050011
Tel: (0311) 86695100

SLC TANGSHAN BRANCH

1308 Room, Torch Building, No.99 Jian she
bei lu, Tangshan City, Hebei 063020
Tel: (0315) 3179450/51

SLC ZHENGZHOU BRANCH

RM.2506, Yuda International Trade Center,
No. 220 Zhongyuan Zhonglu, Zhongyuan
District, Zhengzhou, Henan Province
450007
Tel: (0371) 67719110

SLC LUOYANG BRANCH

Room 516, You Yi Hotel, No.06 Xi Yuan
Road, Jian Xi District, Luoyang City, Henan
Province 471003
Tel: (0379) 64683610

SLC JINAN BRANCH

5-6F, Shungeng Club, No.28 Shun Geng
Rd, Jinan City, Shandong Province 250014
Tel: (0531) 82666088

SLC QINGDAO BRANCH

4F, Yizhong Holiday Hotel, No.76
Xianggang Zhong Road, Qingdao City,
Shandong Province 266071
Tel: (0532) 85735888

SLC YANTAI BRANCH

Room 1603, 16F, Jindu Building, No.9
South Street, Yantai City, Shandong
Province 264001
Tel: (0535) 2121880

SLC ZIBO BRANCH

7F, Zibo Hotel, No.177 Zhongxin Road,
Zhangdian District, Zibo City, Shandong
Province 255036
Tel: (533) 2187877

SLC JINING BRANCH

Room 1306, 13F, No. 21, Wanda Plaza,
Taibai Road, Shizhong District, Jining City,
Shandong Province 272000
Tel: (0537)-3166887

SLC WEIFANG LIAISON OFFICE

Room 1507, Yuanfei Hotel, No.31 Siping
Road, Kuifen District, Weifang City,
Shandong Province 261041
Tel: (0536) 8221866

SLC DEZHOU LIAISON OFFICE

Room 508, 5F, Fengguan Holiday Hotel,
No.2555, Dongfeng East Road, Economic
Development District, Dezhou, Shandong
Province, 253034
Tel: (0471) 6938888-1022

SLC HUHHOT BRANCH

Room1022, 10F, Inner Mongolia Hotel,
West Wu Lan Cha Bu Road, Huhhot City,
Inner Mongolia, 010010
Tel: (0471) 6938888-1022

SLC BAOTOU BRANCH

Room 2107, 21 F, National Trade Building,
No. 66 Steel Street, Baotou City, Inner
Mongolia 014010
Tel: (0472) 2508828

SLC TAIYUAN BRANCH

Room 1609B - 1610, 16F, West Tower,
Shanxi World Trade Center, No.69 Fu
Xi Street, Taiyuan City, Shanxi Province
030002
Tel: (0351) 8689048

SLC DATONG LIAISON OFFICE

2F, Holiday inn Hotel, No. 37 Yin Bin Street,
Da Tong City, ShanXi Province 037008
Tel: (0352)-2118888

SLC XIAN BRANCH

3F Building D, Section 1 of The National
Service Demonstration Base, No.11 Jin Ye
Road, Gaoxin District, Xian City, Shaanxi
Province 710065
Tel: (029) 88319898

SLC LANZHOU BRANCH

Room 2206, Jinjiang Sun Hotel, No. 589
West Road of Donggang, Lanzhou City,
Gansu Province 730000
Tel: (0931) 8885151

SLC YINCHUAN BRANCH

Room 1507, Building A Apollo Hotel,
No.123 Beijing East Road, Yinchuan City,
Ningxia Hui Autonomous Region 750001
Tel: (0951) 7869866

SLC CHENGDU BRANCH

1-2F, C6, Tianfu Software Park, No. 219
Tianhua Er Lu, Chengdu City, Sichuan
Province 610041
Tel: (028) 62387888

SLC YANCHENG LIAISON OFFICE

6F, E1, Tianfu Software Park, No.1268
Tianfu Middle Avenue, Chengdu City,
Sichuan Province 610041
Tel: (028) 62387111

SLC CHONGQING BRANCH

Room 1807-1811, 18F, Chongqing
Metropolitan Oriental Plaza, No. 68
Zourong Road, Yuzhong District,
Chongqing City, 400010
Tel: (023) 63828919

SLC URMUQI BRANCH

Room 918, 9F Gui Bin Building, Xin Jiang
Hong Fu Hotel, No.160 Wu Yi Road, Urumqi
City, Xinjiang Province 830000
Tel: (0991) 5821122

SLC MONGOLIA REP. OFFICE

Bodi Tower - 1001, Sukhbaatar square,
Ulaanbaatar 210620A, Mongolia
Tel: + 976(11)316000 + 976(11)315600

SLC SHANGHAI BRANCH

Siemens Center Shanghai, No.500 Dalian

Road, Yangpu District, Shanghai City
200082
Tel: 400-616-2020

SLC JIANGSU BRANCH

7-18F, Metro Building, No.228 Zhong
Shan Road, Xuanwu District, Nanjing City,
Jiangsu Province 210008
Tel: (025) 84560550

SLC NANJING BRANCH

No.37 Yihuai Street, Jiangning District,
Nanjing City, Jaingsu Province 211000
Tel: (025) 51171475

SLC SUZHOU BRANCH

Room 17-19, 11F, International Building,
No.2 Suzhou Avenue West, Suzhou
Industrial Park, Suzhou City, Jiangsu
Province 215021
Tel: (0512) 62888191

SLC WUXI BRANCH

Room 2401-2402, 24F, Jin Ling Hotel, No.
1 Xiangqian East Road, Wuxi City, Jiangsu
Province 214005
Tel: (0510) 82736868

SLC WUXI INNOVATION CENTER

Room 425, Building E2, China Sensor
Network International Innovation Park,
No.200 Linghu Boulevard, Wuxi City,
Jiangsu Province
Tel: (0510) 85387652

SLC XUZHOU LIAISON OFFICE

Room 7A7, Guomao Building, No.29
Zhongshan North Road, Quanshan District,
Xuzhou City, Jiangsu Province 221000
Tel: (0516)-8370 8388

SLC NANTONG LIAISON OFFICE

Room 1104, Building17 Zhongnan Century
City, No. 8 Taoyuan Road, Chongchuan
District, Nantong City, Jiangsu Province,
226018
Tel: (0513) 8102 9880

SLC YANGZHOU LIAISON OFFICE

Room 809, Gong Yuan International
Building, No. 56 Wen Chang West Road,
Guang Ling District, Yangzhou City,
Jiangsu Province 225012
Tel: (0514) 87894566

SLC CHANGZHOU LIAISON OFFICE

Room 989, Jiu Zhou Huan Yu Mansion, No.
66 Guan He Dong Road, Changzhou City,
Jiangsu Province 213001
Tel: (0519) 89895801

SLC YANCHENG LIAISON OFFICE

Room A2004, Huabang International
Building, No. 1 Yancheng Renming South
Road, Yancheng City, Jiangsu Province
224001
Tel: (0515)88362680

SLC KUNSHAN LIAISON OFFICE

Room 1019, Building A, Xiandai Square,
No. 18 Weiye Road, Kunshan City, Jiangsu
Province
Tel: (0512) 55118321

SLC ZHEJIANG BRANCH

Room 1505, Jiahua International Business
Center, No.15 Hangda Road, Xihu District,
Hangzhou City, Zhejiang Province 310007
Tel: (0571) 87652999

SLC NINGBO BRANCH

Room 2511, Shangdong Business Center,
No. 1926 Canghai Road, Ningbo City,
Zhejiang Province 315040
Tel: (0574) 87855377

SLC WENZHOU BRANCH

Room 1506A, 15F, Fortune Center,
No.577, Chezhan Road, Lucheng
District, Wenzhou City, Zhejiang
Province 325000
Tel: (0577) 8606 7091/8606 7092

SLC SHAOXING LIAISON OFFICE

Room 1020, 10F Margaret Hotel,
Jiefang North Road Margaret Business
Center, Shaoxing City, Zhejiang
Province 312000
Tel: (0575) 88201306/ 88201759

SLC JIAXING LIAISON OFFICE

Room1707, 17F, Fortune Square,
No.527 Zhongshan West Road,
Xiuzhou District, Jiaxing City, Zhejiang
Province 314000
Tel: +86(573)-8272 0971/ 8272 6928

SLC HEFEI BRANCH

Room 2701-2702, Fortune Plaza, No.
278 Suixi Road, Hefei City, Anhui
Province 230041
Tel: (0551) 65681299

SLC WUHAN BRANCH

Room 2102, 21F, Wuhan Poly Plaza,
No.99, Zhongnan Road, Wuchang
District, Wuhan City, Hubei Province
430071
Tel: (027) 8548 6688

SLC WUHAN INNOVATION CENTER

Room 401, C2-3 Building, Wuhan East
Lake High-Tech Develop Zone, No.666
Gaixin Road, Wuhan City, Hubei
Province 430075

SLC YICHANG LIAISON OFFICE

Room 2011, Qingjiang Tower, No.
95 Dongshan Avenue, Yichang City,
Hubei Province 443000
Tel: (0717) 6319033

SLC XIANYANG LIAISON OFFICE

Room 2001, Leading Center Building ,
No. 10 Chunyuan Road, Xiangyang
City, Hubei Province 441000
Tel: (710)-322 8508

SLC CHANGSHA BRANCH

Room 2101, Cyber Times Building,
No. 456 Wuyi Avenue, Changsha City,
Hunan Province 410011
Tel: (0731) 84467770

SLC ZHUZHOU BRANCH

Siemens Building, North Entrance of CRS,
No. 1 Tianxin Road, Shifeng District,
Zhuzhou City, Hunan Province 412001
Tel: (0731) 28440866

SLC NANCHANG BRANCH

Room 1403-1405, Jiangxin
International Building, No. 88 Beijing
West Road, Nanchang City, Jiangxi
Province 330046
Tel: (0791) 86304866

SLC GUANGZHOU BRANCH

8F-10F, Teem Tower, 208 Tianhe Road,
Tianhe District, Guangzhou City,
Guangdong Province 510620
Tel: (020) 37182888

SLC SHENZHEN BRANCH

9F Hangtang Building, Overseas
Chinese Town, Shenzhen City,
Guangdong Province 518053
Tel: (0755) 26935188

SLC DONGGUAN BRANCH

Room 1510, Winner Way Building, No.1
Hongyuan Road, Nancheng District,

Dongguan City, Guangdong Province
523087
Tel: (0769) 22409881

SLC ZHUHAI LIAISON OFFICE

Room 1303A, 13F Zhuhai Tibet Hotel,
No.166 Meihua West Street, Zhuhai City,
Guangdong Province 519000
Tel: (0756)-3375 003 / 135

SLC FOSHAN LIAISON OFFICE

Block K, 19F Dongjian Plaza, No. 121
Fenjiang Zhong Road, Foshan City,
Guangdong Province 528000
Tel: (0757) 82326710

SLC SHANTOU LIAISON OFFICE

Room 1920, Golden Gulf Hotel, Shantou
City, Guangdong Province 515041
Tel: (0754) 88481196

SLC FUZHOU BRANCH

Room 04-05, 11F Landmark Plaza, No.89
Wu Si Road, Fuzhou City, Fujian Province
350003
Tel: (0591) 87500888

SLC XIAMEN BRANCH

Room 2111-2112, 21F Bank Center, No.
189 Xiahe Road, Xiamen City, Fujian
Province 361003
Tel: (0592) 2685508

SLC QUANZHOU LIAISON OFFICE

11F, Quanzhou Overseas Chinese Hotel ,
No.1 of Baiyuan Road, Licheng District,
Quanzhou City, Fujian Province 362000
Tel: +86(595)-28981018

SLC NANNING BRANCH

Room 935, 9F King Wealth CBD, No.
63 Jin Hu Road, Nanning City, Guangxi
Province 530022
Tel: (0771) 5520700

SLC GUIYANG BRANCH

Room 01&02, 14F, E7 Building,
Pengjiawan, No.1 International Financial
Street, Nanming District, Guiyang City,
Guizhou Province 550003
Tel: +86(851)-8551 0310

SLC KUNMING BRANCH

Room 1203-1204, 12F Hongta Mansion,
No. 155 Beijing Road, Kunming City,
Yunnan Province 650011
Tel: (0871)-6315 8080

SLC HAIKOU LIAISON OFFICE

Room 803, 8F Baohua Harbour View Hotel,
No.69 Binhai Road, Haikou, Hainan
570105
Tel: (0898) 66788038

**Siemens Factory Automation
Engineering Ltd. (SFAE)****SFAE Headquarter**

8F, A1 Building, No.9 Jiuxianqiao East
Rd., Chaoyang District,
Beijing, 100015, P.R. China
Tel: (010) 8459 7212
(010) 8459 7239
(010) 8430 7800

SFAE Anshan Branch

No.452, QianAn Rd, Tiedong District,
Anshan, Liaoning, 114010, P. R. China
Tel: (0412) 558 1611-8018

Siemens Ltd., China
Energy Management Division

Subject to change without prior notice
Order No.:
EMMS-B80016-00-5DCN
1790-D906430-1016e

The information provided in this brochure contains descriptions
or characteristics of performance which in case of actual use do
not always apply as described or which may change as a result of
further development of the products. An obligation to provide the
respective characteristics shall only exist if expressly agreed in the
terms of contract.

All product names may be brand names of Siemens Ltd or another
supplier whose use by third-parties for their own purposes may
violate the owner's rights.