


**MODEL FL-D-2**

**HIGH PERFORMANCE 2" FIXED LOUVER**



**STANDARD CONSTRUCTION:**

- Frame:** .060 Extruded Aluminum, 2.16" Deep
- Blade:** .060 Extruded Aluminum positioned on a 37° angle on approximately 1.47" centers
- Birdscreen:** .75" x .051" Flattened Aluminum in removable frame. Screen is mounted as standard on inside (rear) as looking from exterior of building.
- Finish:** AAMA 2604 (Matte Black)
- Minimum Size:** 12 x12
- Maximum Single Section:** 120"w x 84"h or 84"w x 120"h
- Note:** 10' max width

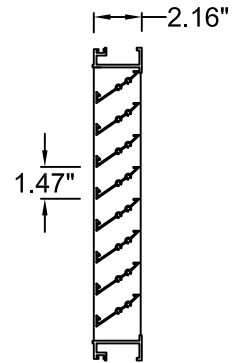


**OPTIONS:**


- Flanged Frame (1.50" std.), (1" std for shapes R\_ )
- Custom Flange (1", 2" , or 3"), (1.5", 2", or 3" for shapes R\_ )
- Extended Sill
- Glazing Adapter (.50" or .75")
- Insect Screen (Other Screens Available, See Screen Page)
- Filter Racks (no screen)
- Security Bars
- Hinged Sub Frame
- Welded Construction (Wind Load +/- 50 psf)
- Blank-off, Alum., non-insulated, no screen, non-removeable
- Blank-off, Alum., non-insulated, with bird screen or insect screen
- Blank-off, Alum., insulated double wall, with bird screen, removable
- Blank-off, Alum., insulated double wall, no screen, non-removeable

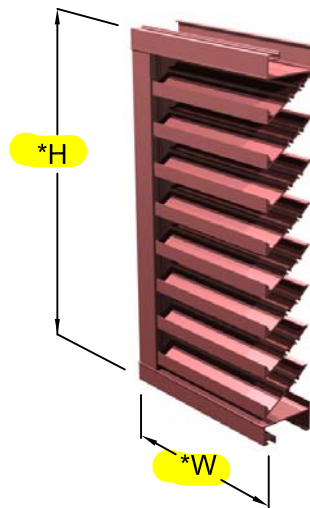

OPTIONAL FLANGE  
(except R\_ Shapes, 1" optional std)



OPTIONAL  
GLAZING ADAPTER

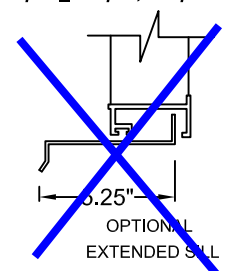

OPTIONAL  
EXTENDED SILL

**AVAILABLE FINISHES:**

- Durable Polyester (AAMA 2604)
- 70% PVDF Fluoropolymer (AAMA 2605)
- Yellow Primer
- Clear Anodize
- Dark Bronze Anodize

\*Width and Height dimensions are approximately 1/4" under listed size.

Due to continuing research, United Enertech reserves the right to change specifications without notice.




3005 South Hickory Street  
Chattanooga, Tennessee 37407  
Tel: (423) 698-7715  
Fax: (423) 698-6629  
www.unitedenertech.com

**MODEL FL-D-2 (Drainable Blade w/ Jamb Gutters and Downspouts)**

DRAWN BY: MHM	DATE: January 2010	REV. DATE: October 2018	REV. NO. 6	APPROVED BY: BGT	DWG. NO.: A-1
------------------	-----------------------	----------------------------	---------------	---------------------	------------------


# PERFORMANCE DATA

## WATER PENETRATION

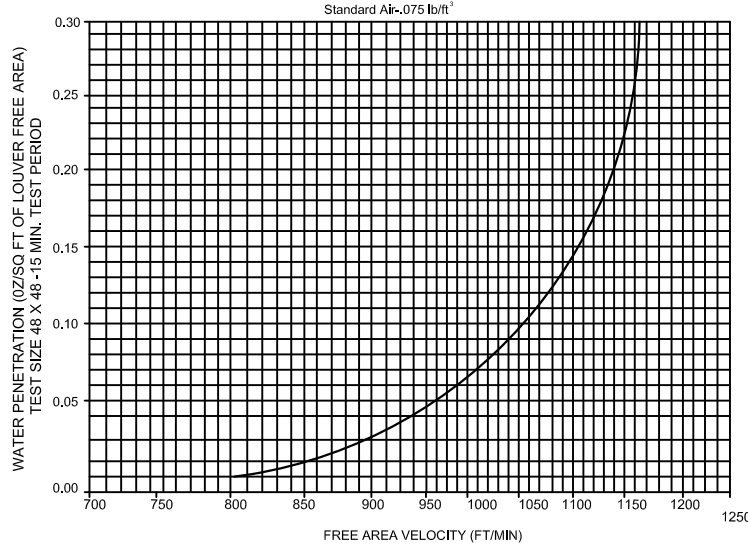

Beginning point of WATER PENETRATION  
is  
805 fpm  
free area velocity at .01 oz. of water penetration

## AIR FLOW RESISTANCE

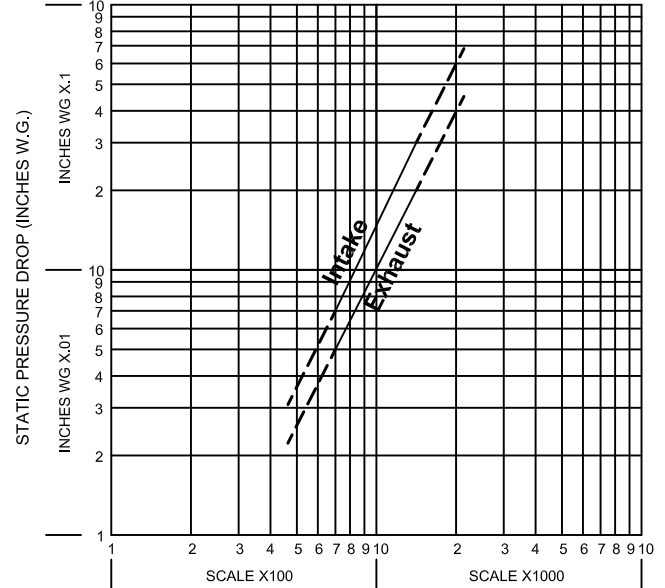

Based on STANDARD AIR-.075 lb. per cubic foot.  
Ratings do not include the effects of screen.  
Test size 48" x 48"

## FREE AREA CHART (SQUARE FEET)

Louver Height Inches	Louver Width In Inches																Louver Height Inches			
	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102		108	114	120
12	0.33	0.54	0.74	0.95	1.16	1.36	1.57	1.77	1.98	2.18	2.39	2.59	2.80	3.00	3.21	3.41	3.62	3.82	4.03	12
18	0.57	0.92	1.27	1.63	1.98	2.33	2.68	3.03	3.38	3.74	4.09	4.44	4.79	5.14	5.49	5.85	6.20	6.55	6.90	18
24	0.81	1.31	1.81	2.30	2.80	3.30	3.80	4.30	4.79	5.29	5.79	6.29	6.79	7.28	7.78	8.28	8.78	9.28	9.77	24
30	1.11	1.79	2.47	3.15	3.83	4.52	5.20	5.88	6.56	7.24	7.93	8.61	9.29	9.97	10.65	11.33	12.02	12.70	13.38	30
36	1.35	2.19	3.02	3.85	4.69	5.52	6.35	7.19	8.02	8.85	9.69	10.52	11.35	12.19	13.02	13.85	14.69	15.52	16.35	36
42	1.60	2.58	3.57	4.55	5.54	6.52	7.51	8.49	9.48	10.46	11.45	12.43	13.42	14.40	15.39	16.37	17.36	18.34	19.33	42
48	1.85	2.98	4.12	5.26	6.39	7.53	8.66	9.80	10.94	12.07	13.21	14.35	15.48	16.62	17.75	18.89	20.03	21.16	22.30	48
54	2.09	3.38	4.67	5.96	7.24	8.53	9.82	11.11	12.39	13.68	14.97	16.26	17.55	18.83	20.12	21.41	22.70	23.98	25.27	54
60	2.34	3.78	5.22	6.66	8.10	9.54	10.97	12.41	13.85	15.29	16.73	18.17	19.61	21.05	22.49	23.93	25.37	26.81	28.25	60
66	2.53	4.09	5.65	7.21	8.77	10.33	11.89	13.45	15.00	16.56	18.12	19.68	21.24	22.80	24.36	25.92	27.48	29.03	30.59	66
72	2.77	4.48	6.18	7.89	9.59	11.30	13.00	14.71	16.41	18.12	19.82	21.53	23.23	24.94	26.64	28.35	30.06	31.76	33.47	72
78	3.01	4.86	6.71	8.56	10.42	12.27	14.12	15.97	17.82	19.67	21.52	23.38	25.23	27.08	28.93	30.78	32.63	34.49	36.34	78
84	3.25	5.24	7.24	9.24	11.24	13.24	15.23	17.23	19.23	21.23	23.23	25.22	27.22	29.22	31.22	33.22	35.21	37.21	39.21	84
90	3.48	5.63	7.77	9.92	12.06	14.21	16.35	18.49	20.64	22.78	24.93	27.07	29.22	31.36	33.50	35.65	37.79	39.94	42.08	90
96	3.72	6.01	8.30	10.59	12.88	15.18	17.47	19.76	22.05	24.34	26.63	28.92	31.21	33.50	35.79	38.08	40.37	42.66	44.95	96
102	4.02	6.50	8.97	11.45	13.92	16.40	18.87	21.35	23.82	26.30	28.77	31.25	33.72	36.20	38.67	41.15	43.62	46.10	48.57	102
108	4.27	6.89	9.52	12.15	14.77	17.40	20.03	22.65	25.28	27.91	30.53	33.16	35.79	38.41	41.04	43.67	46.29	48.92	51.55	108
114	4.51	7.29	10.07	12.85	15.63	18.41	21.18	23.96	26.74	29.52	32.30	35.07	37.85	40.63	43.41	46.19	48.96	51.74	54.52	114
120	4.76	7.69	10.62	13.55	16.48	19.41	22.34	25.27	28.20	31.13	34.06	36.99	39.92	42.85	45.78	48.71	51.63	54.56	57.49	120



United Enertech certifies that the FL-D-2 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA certified rating seal applies to air performance ratings and water penetration ratings.

## SUGGESTED SPECIFICATION

Furnish and install louvers as hereinafter specified where shown on plans or as described in schedules. Louvers shall be stationary drainable type with drain gutters in each blade and downspouts in jambs and mullions. Stationary drainable blades shall be contained within a 2.16" frame. Louver components (heads, jambs, sills, blades, and mullions) shall be factory assembled by the louver manufacturer. Louver sizes too large for shipping shall be built up by the contractor from factory assembled louver sections to provide overall sizes required. Louver design shall incorporate structural supports required to withstand a wind load of 30 lbs. Per sq. ft. (equivalent of a 110 mph).

Published louver performance data bearing the AMCA Certified Ratings Seal for Air Performance & Water Penetration must be submitted for approval prior to fabrication and must demonstrate pressure drop and water penetration equal to or less than the United Enertech model specified.

Louvers shall be United Enertech model FL-D-2, 6063-T6 extruded aluminum construction as follows:  
 Frame: 2.16" deep, .060 nominal wall thickness.  
 Blades: .060 nominal wall thickness. Drainable.  
 Blades are positioned at 37-degree angle and spaced approximately 1.47" center to center.  
 Screen: .75" x .051" (19 x 1.3) expanded, flattened aluminum in removable frame.  
 Finish: Select finish specification from United Enertech Finishes Brochure.