


Rail less mounting

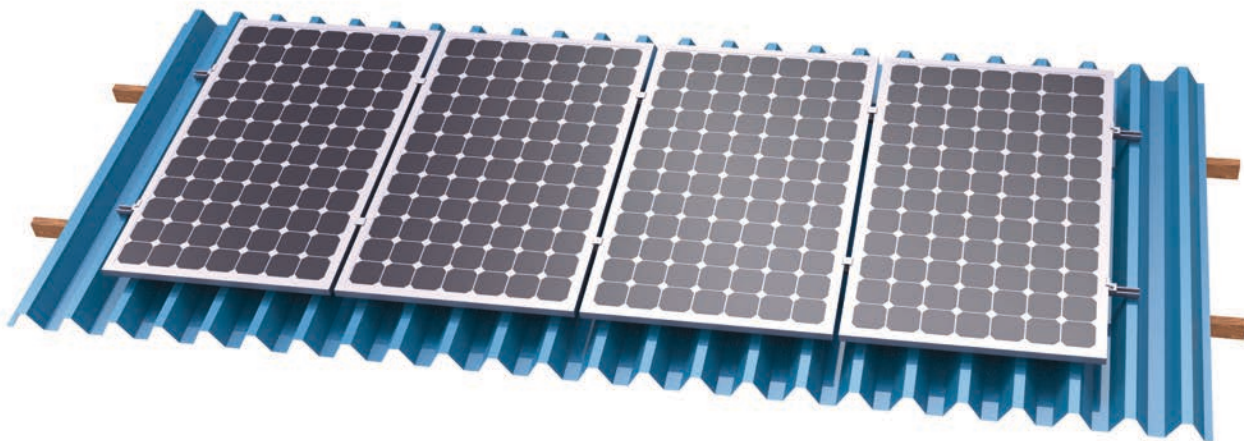


Technical data

- Roof: Trapezoidal, corrugated, sandwich roofing, standing seam
- Roof slope: Up to 12°
- Building height: Up to 20 m
- Wind speed: Up to 60 m/s
- PV module: Framed
- Module orientation: Landscape, portrait
- Material: AL 6005 T5 & SUS 304, 410
- Warranty: 10 years

Features

- Less installation time
- Cost effective
- Easy warehouse management
- Rail length customizable

System components

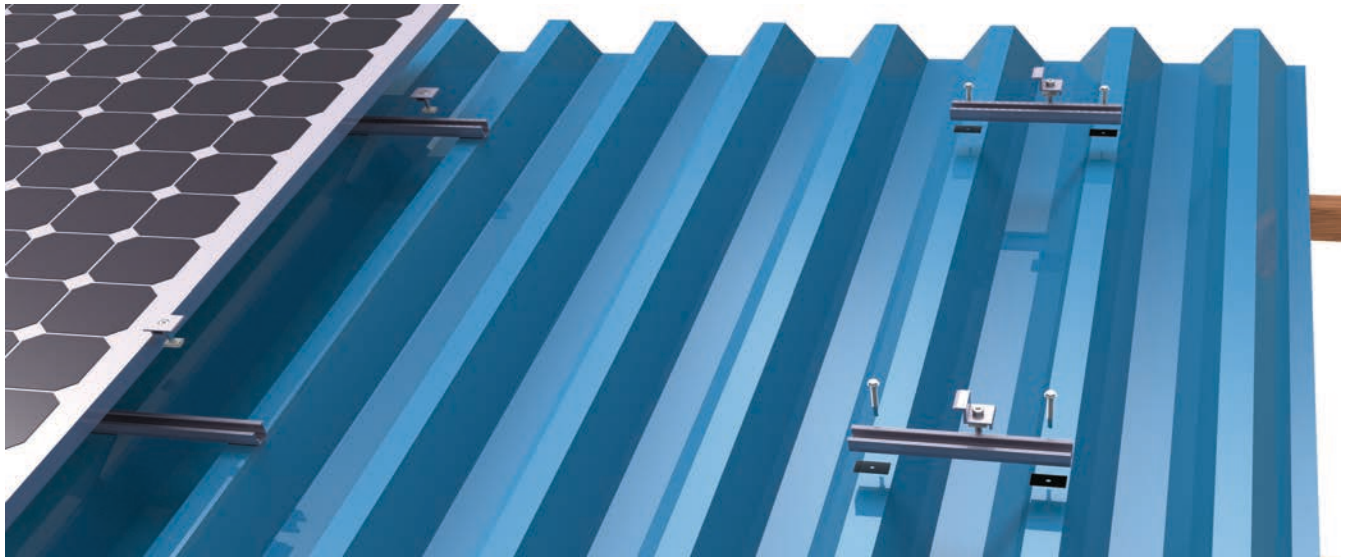

Installation procedure



Secured the mini rail across the roof ridges with tapping screw(6.3x25)



Fixing the panels by end clamps



Fixing the panels on rails by mid clamps